

**(19) World Intellectual Property Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number
WO 01/87207 A1

(51) International Patent Classification⁷: A61F 13/15,
13/56

(21) International Application Number: PCT/US01/15244

(22) International Filing Date: 11 May 2001 (11.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 09/571,906 16 May 2000 (16.05.2000) US

(71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 North Lake Street, Neenah, WI 54956 (US).

(72) Inventors: POPP, Robert, Lee; 805 Giese Street, Hortonville, WI 54944 (US). COENEN, Joseph, D.; 510 Lincoln Street, Neenah, WI 54956 (US). COUILLARD,

Jack, L.: 1777 Brighton Beach Road, Menasha, WI 54952 (US). **OLSON, Christopher, Peter:** 1012 Pendleton Road, Neenah, WI 54956 (US). **KUEN, David, Arthur:** 1086 Honeysuckle Lane, Neenah, WI 54956 (US). **QUERESHI, Shawn, A.:** 661 Belmont Court, Neenah, WI 54956 (US).


(74) Agents: RAUCH, Melanie, I.; Pauley Petersen Kinne & Fejer, Suite 365, 2800 West Higgins Road, Hoffman Estates, IL 60195 et al. (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: PROCESS FOR MAKING A GARMENT WITH DUAL REFASTENABLE LAP SEAMS

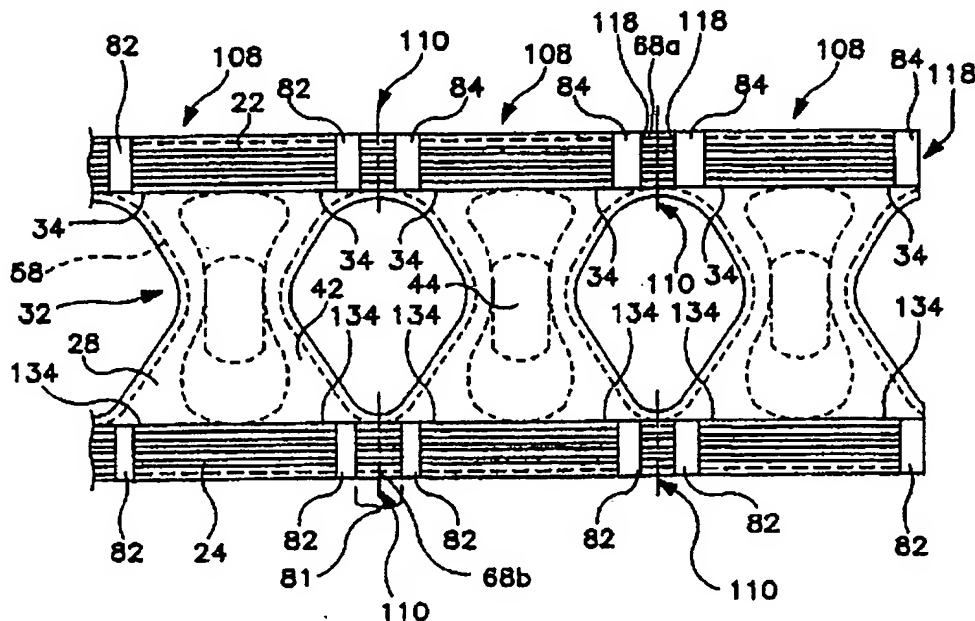

(57) Abstract: A method of producing refastenable side seams in an absorbent garment results in an absorbent garment that is adapted to easy application and removal. The refastenable side seams can be produced in either a cross direction or a machine direction. Each of the refastenable side seams is a dual side seam (100) that includes a front lap seam and a back lap seam. The resulting garment can be opened and closed on either a front side of the garment or a back side of the garment on either a left side or a right side of the garment.

WO 01/87207 A1

BEST AVAILABLE COPY

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

PROCESS FOR MAKING A GARMENT WITH DUAL REFASTENABLE LAP SEAMS

FIELD OF THE INVENTION

5 This invention is directed to a process for making pant-like, personal care absorbent products having hook and loop fasteners on the side panels for ease of removal and donning without complete removal of a wearer's clothing.

BACKGROUND OF THE INVENTION

10 Pant-like absorbent garments, such as adult incontinence wear as well as infant and children's diapers, swim wear and training pants, typically have adhesive fasteners on the sides for donning and removal, or else rely on the waist opening and leg openings to slide on and off the wearer. Adhesive fasteners wear out in as little as one use. Therefore, if a care giver checks the status of the wearer's absorbent garment contents by unfastening an adhesive fastener, the garment often must be replaced due to a worn out adhesive fastener even if the absorbent garment itself is not in need of changing.

15 Absorbent garments that slide on and off a wearer are often messy when full. Furthermore, in order to remove such absorbent garments, the wearer's clothing covering the absorbent garments, such as pants, must be completely removed. Checking the status of the wearer's absorbent garment contents is often just as cumbersome as changing the absorbent garment.

20 There is a need or desire for a process for making pant-like, personal care absorbent garments that have refastenable side seams for ease of removal and donning without complete removal of a wearer's clothing.

SUMMARY OF THE INVENTION

25 The present invention is directed to a process for making pant-like absorbent garments having hook and loop fasteners applied at the sides of the garments. The process can be carried out in either the cross direction or in the machine direction. In the process of the invention, a fastening component is attached to each of two front side panels and to each of two back side panels of the garment assembly. A pair of mating fastening components, folded lengthwise, is placed over two of the fastening components, either both on the front
30 side panels or both on the back side panels. The folded edges of the mating fastening

components face the distal edges, or the planned distal edges, of the front and back side panels. In the cross direction process, the assembly, or a plurality of adjacent assemblies, is then folded such that the folded mating fastening components are between one of the fastening components on the front side panel and one of the fastening components on the back side panel. Adjacent assemblies are then separated, thereby resulting in prefastened individual garments. In the machine direction process, the adjacent assemblies are first separated from one another and then folded, thereby resulting in prefastened individual garments.

The resulting absorbent garments have dual refastenable lap side seams and can be easily fitted to and removed from a wearer without complete removal of a wearer's clothing. The refastenable side seams extend from a waist opening to each of two leg openings between a front panel and a back panel, and are "dual-sided" such that the garment can be unfastened at either the front panel or the back panel. Each of the refastenable side seams includes a fastening component and a mating fastening component, each of which comprises either a hook material or a loop material. The refastenable lap side seams experience a shearing strain during use, as opposed to peel forces, thereby reducing the likelihood of the seams opening unexpectedly.

With the foregoing in mind, it is a feature and advantage of the invention to provide a process for making a pant-like absorbent garment that can be easily applied to and easily removed from a wearer without the need to entirely remove the wearer's clothing.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side perspective view of an absorbent garment having dual refastenable lap side seams;

Fig. 2 is a plan view of an absorbent garment in a partially disassembled, stretched flat state, and showing the surface of the article that faces away from the wearer when the article is worn;

Fig. 3 is a plan view of an absorbent garment in a partially disassembled, stretched flat state, and showing the surface of the article that faces the wearer when the article is worn, and with portions cut away to show the underlying features;

Fig. 4 is a plan view of a cross direction assembly for producing an absorbent garment having dual refastenable lap side seams;

Fig. 5 is a plan view of a machine direction assembly for producing an absorbent garment having dual refastenable lap side seams;

5 Fig. 6 is a top view of a fastening system during assembly in an absorbent garment having dual refastenable lap side seams; and

Fig. 7 is a top view of an absorbent garment having dual refastenable lap side seams.

DEFINITIONS

10 Within the context of this specification, each term or phrase below will include the following meaning or meanings.

"Bonded" refers to the joining, adhering, connecting, attaching, or the like, of two elements. Two elements will be considered to be bonded together when they are bonded directly to one another or indirectly to one another, such as when each is directly
15 bonded to intermediate elements.

"Connected" refers to the joining, adhering, bonding, attaching, or the like, of two elements. Two elements will be considered to be connected together when they are connected directly to one another or indirectly to one another, such as when each is directly
connected to intermediate elements.

20 "Cross direction" refers to the width of a fabric in a direction generally perpendicular to the direction in which it is produced, as opposed to "machine direction" which refers to the length of a fabric in the direction in which it is produced.

"Cross direction assembly" refers to a process in which disposable absorbent products are manufactured in an orientation in which the products are connected side-to-side, in the transverse direction shown by arrow 49 in Fig. 3, a process utilizing a cross direction
25 assembly entails products traveling through a converting machine parallel to the direction of arrow 49, as opposed to "machine direction assembly" in which the products are connected end-to-end or waist-to-waist.

30 "Disposable" refers to articles which are designed to be discarded after a limited use rather than being laundered or otherwise restored for reuse.

"Disposed," "disposed on," and variations thereof are intended to mean that one element can be integral with another element, or that one element can be a separate structure bonded to or placed with or placed near another element.

5 "Elastic," "elasticized" and "elasticity" mean that property of a material or composite by virtue of which it tends to recover its original size and shape after removal of a force causing a deformation.

10 "Elastomeric" refers to a material or composite which can be elongated by at least 25 percent of its relaxed length and which will recover, upon release of the applied force, at least 10 percent of its elongation. It is generally preferred that the elastomeric material or composite be capable of being elongated by at least 100 percent, more preferably by at least 300 percent, of its relaxed length and recover, upon release of an applied force, at least 50 percent of its elongation.

"Fabrics" is used to refer to all of the woven, knitted and nonwoven fibrous webs.

15 "Film" refers to a thermoplastic film made using a film extrusion and/or foaming process, such as a cast film or blown film extrusion process. The term includes apertured films, slit films, and other porous films which constitute liquid transfer films, as well as films which do not transfer liquid.

20 "Flexible" refers to materials which are compliant and which will readily conform to the general shape and contours of the wearer's body.

25 "Hydrophilic" describes fibers or the surfaces of fibers which are wetted by the aqueous liquids in contact with the fibers. The degree of wetting of the materials can, in turn, be described in terms of the contact angles and the surface tensions of the liquids and materials involved. Equipment and techniques suitable for measuring the wettability of particular fiber materials or blends of fiber materials can be provided by a Cahn SFA-222 Surface Force Analyzer System, or a substantially equivalent system. When measured with this system, fibers having contact angles less than 90° are designated "wetable" or hydrophilic, while fibers having contact angles greater than 90° are designated "nonwetable" or hydrophobic.

"Integral" or "integrally" is used to refer to various portions of a single unitary element rather than separate structures bonded to or placed with or placed near one another.

"Layer" when used in the singular can have the dual meaning of a single element or a plurality of elements.

5 "Liquid impermeable," when used in describing a layer or multi-layer laminate, means that a liquid, such as urine, will not pass through the layer or laminate, under ordinary use conditions, in a direction generally perpendicular to the plane of the layer or laminate at the point of liquid contact. Liquid, or urine, may spread or be transported parallel to the plane of the liquid impermeable layer or laminate, but this is not considered to be
10 within the meaning of "liquid impermeable" when used herein.

"Liquid permeable material" or "liquid water-permeable material" refers to a material present in one or more layers, such as a film, nonwoven fabric, or open-celled foam, which is porous, and which is water permeable due to the flow of water and other aqueous liquids through the pores. The pores in the film or foam, or spaces between fibers
15 or filaments in a nonwoven web, are large enough and frequent enough to permit leakage and flow of liquid water through the material.

"Longitudinal" and "transverse" have their customary meaning, as indicated by the longitudinal and transverse axes depicted in Fig. 3. The longitudinal axis lies in the plane of the article and is generally parallel to a vertical plane that bisects a standing wearer
20 into left and right body halves when the article is worn. The transverse axis lies in the plane of the article generally perpendicular to the longitudinal axis. The article as illustrated is longer in the longitudinal direction than in the transverse direction.

"Machine direction" refers to the length of a fabric in the direction in which it is produced, as opposed to "cross direction" which refers to the width of a fabric in a
25 direction generally perpendicular to the machine direction.

"Machine direction assembly" refers to a process in which disposable absorbent products are manufactured in an orientation in which the products are connected end-to-end or waist-to-waist, in the longitudinal direction shown by arrow 48 in Fig. 3, a process utilizing a machine direction assembly entails products traveling through a

converting machine parallel to the direction of arrow 48, as opposed to "cross direction assembly" in which the products are connected side-to-side.

5 "Meltblown fiber" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity heated gas (e.g., air) streams which attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed for example, in U.S. Patent 3,849,241 to Butin
10 et al. Meltblown fibers are microfibers which may be continuous or discontinuous, are generally smaller than about 0.6 denier, and are generally self bonding when deposited onto a collecting surface. Meltblown fibers used in the present invention are preferably substantially continuous in length.

15 "Member" when used in the singular can have the dual meaning of a single element or a plurality of elements.

"Nonwoven" and "nonwoven web" refer to materials and webs of material which are formed without the aid of a textile weaving or knitting process.

20 "Operatively joined," in reference to the attachment of an elastic member to another element, means that the elastic member when attached to or connected to the element, or treated with heat or chemicals, by stretching, or the like, gives the element elastic properties; and with reference to the attachment of a non-elastic member to another element, means that the member and element can be attached in any suitable manner that permits or allows them to perform the intended or described function of the joinder. The joining, attaching, connecting or the like can be either directly, such as joining either member directly
25 to an element, or can be indirectly by means of another member disposed between the first member and the first element.

"Peel force" and "peel strain" refer to forces that tend to pull two adjoining bodies away from one another in opposite directions generally perpendicular to a plane in which the bodies are joined.

"Permanently bonded" refers to the joining, adhering, connecting, attaching, or the like, of two elements of an absorbent garment such that the elements tend to be and remain bonded during normal use conditions of the absorbent garment.

5 "Polymers" include, but are not limited to, homopolymers, copolymers, such as for example, block, graft, random and alternating copolymers, terpolymers, etc. and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term "polymer" shall include all possible geometrical configurations of the material. These configurations include, but are not limited to isotactic, syndiotactic and atactic symmetries.

10 "Refastenable" refers to the property of two elements being capable of releasable attachment, separation, and subsequent releasable reattachment without substantial permanent deformation or rupture.

15 "Releasably attached," "releasably engaged" and variations thereof refer to two elements being connected or connectable such that the elements tend to remain connected absent a separation force applied to one or both of the elements, and the elements being capable of separation without substantial permanent deformation or rupture. The required separation force is typically beyond that encountered while wearing the absorbent garment.

"Shearing strain" refers to forces that tend to produce an opposite but parallel sliding motion between two bodies' planes.

20 "Spunbonded fiber" refers to small diameter fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine capillaries of a spinnerette having a circular or other configuration, with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Patent 4,340,563 to Appel et al., and U.S. Patent 3,692,618 to Dorschner et al., U.S. Patent 3,802,817 to Matsuki et al.,
25 U.S. Patents 3,338,992 and 3,341,394 to Kinney, U.S. Patent 3,502,763 to Hartmann, U.S. Patent 3,502,538 to Petersen, and U.S. Patent 3,542,615 to Dobo et al., each of which is incorporated herein in its entirety by reference. Spunbond fibers are quenched and generally not tacky when they are deposited onto a collecting surface. Spunbond fibers are generally continuous and often have average deniers larger than about 0.3, more particularly, between
30 about 0.6 and 10.

"Stretchable" means that a material can be stretched, without breaking, to at least 150% of its initial (unstretched) length in at least one direction, suitably to at least 200% of its initial length, desirably to at least 250% of its initial length.

5 "Superabsorbent" or "superabsorbent material" refers to a water-swellable, water-insoluble organic or inorganic material capable, under the most favorable conditions, of absorbing at least about 15 times its weight and, more desirably, at least about 30 times its weight in an aqueous solution containing 0.9 weight percent sodium chloride. The superabsorbent materials can be natural, synthetic and modified natural polymers and materials. In addition, the superabsorbent materials can be inorganic materials, such as silica
10 gels, or organic compounds such as cross-linked polymers.

"Surface" includes any layer, film, woven, nonwoven, laminate, composite, or the like, whether pervious or impervious to air, gas, and/or liquids.

"Thermoplastic" describes a material that softens when exposed to heat and which substantially returns to a nonsoftened condition when cooled to room temperature.

15 These terms may be defined with additional language in the remaining portions of the specification.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

20 The present invention is directed to a process for making a pant-like absorbent garment having refastenable fasteners, such as hook and loop fasteners, on the side panels for ease of removal and donning of the absorbent garment without complete removal of a wearer's clothing.

25 The principles of the present invention can be incorporated into any suitable disposable absorbent article. Examples of such suitable articles include diapers, training pants, feminine hygiene products, incontinence products, other personal care or health care garments, or the like. For ease of explanation, the description hereafter will be in terms of a child's training pant.

30 Referring to Fig. 1, a disposable absorbent article, such as a training pant 20, is illustrated in a partially fastened condition. The training pant 20 includes an absorbent chassis 32 and a fastening system 80. The absorbent chassis 32 defines a front region 22, a

back region 24, a crotch region 26 interconnecting the front and back regions, an inner surface 28 which is configured to contact the wearer, and an outer surface 30 opposite the inner surface which is configured to contact the wearer's clothing. With additional reference to Figs. 2 and 3, the absorbent chassis 32 also defines a pair of transversely opposed side edges 36 and a pair of longitudinally opposed waist edges, which are designated front waist edge 38 and back waist edge 39. The front region 22 is contiguous with the front waist edge 38, and the back region 24 is contiguous with the back waist edge 39.

The illustrated absorbent chassis 32 includes a rectangular composite structure 33, a pair of transversely opposed front side panels 34, and a pair of transversely opposed back side panels 134. The composite structure 33 and side panels 34 and 134 may be integrally formed, as shown in Fig. 1, or may include two or more separate elements, as shown in Figs. 2 and 3. The illustrated composite structure 33 includes an outer cover 40, a bodyside liner 42 which is connected to the outer cover in a superposed relation, an absorbent assembly 44 (Fig. 3) which is located between the outer cover 40 and the bodyside liner 42, and a pair of containment flaps 46 (Fig. 3). The rectangular composite structure 33 has opposite linear end edges 45 that form portions of the front and back waist edges 38 and 39, and opposite linear side edges 47 that form portions of the side edges 36 of the absorbent chassis 32 (Figs. 2 and 3). For reference, arrows 48 and 49 depicting the orientation of the longitudinal axis and the transverse axis, respectively, of the training pant 20 are illustrated in Figs. 2 and 3.

With the training pant 20 in the fastened position as partially illustrated in Fig. 1, the front and back regions 22 and 24 are joined together to define a three-dimensional pant configuration having a waist opening 50 and a pair of leg openings 52. The front region 22 includes the portion of the training pant 20 which, when worn, is positioned on the front of the wearer while the back region 24 includes the portion of the training pant which, when worn, is positioned on the back of the wearer. The crotch region 26 of the training pant 20 includes the portion of the training pant which, when worn, is positioned between the legs of the wearer and covers the lower torso of the wearer. The front and back side panels 34 and 134 include the portions of the training pant 20 which, when worn, are positioned on the hips of the wearer.

The front region 22 of the absorbent chassis 32 includes the transversely opposed front side panels 34 and a front center panel 35 (Figs. 2 and 3) positioned between and interconnecting the side panels, along with a front waist elastic member 54 and any other connected components. The back region 24 of the absorbent chassis 32 includes the transversely opposed back side panels 134 and a back center panel 135 (Figs. 2 and 3) positioned between and interconnecting the side panels, as well as a rear waist elastic member 56 and any other connected components. The waist edges 38 and 39 of the absorbent chassis 32 are configured to encircle the waist of the wearer when worn and provide the waist opening 50 which defines a waist perimeter dimension. Portions of the transversely opposed side edges 36 in the crotch region 26 generally define the leg openings 52.

The absorbent chassis 32 is configured to contain and/or absorb any body exudates discharged from the wearer. For example, the absorbent chassis 32 desirably although not necessarily includes the pair of containment flaps 46 which are configured to provide a barrier to the transverse flow of body exudates. A flap elastic member 53 (Fig. 3) is operatively joined with each containment flap 46 in any suitable manner as is well known in the art. The elasticized containment flaps 46 define an unattached edge which assumes an upright, generally perpendicular configuration in at least the crotch region 26 of the training pant 20 to form a seal against the wearer's body. The containment flaps 46 can be located along the transversely opposed side edges of the absorbent chassis 32, and can extend longitudinally along the entire length of the absorbent chassis or may only extend partially along the length of the absorbent chassis. Suitable constructions and arrangements for the containment flaps 46 are generally well known to those skilled in the art and are described in U.S. Patent 4,704,116 issued November 3, 1987 to Enloe, which is incorporated herein by reference.

To further enhance containment and/or absorption of body exudates, the training pant 20 desirably includes the front waist elastic member 54, the rear waist elastic member 56, and leg elastic members 58, as are known to those skilled in the art (Fig. 3). The waist elastic members 54 and 56 can be operatively joined to the outer cover 40 and/or bodyside liner 42 along the opposite waist edges 38 and 39, and can extend over part or all

of the waist edges. The leg elastic members 58 are desirably operatively joined to the outer cover 40 and/or bodyside liner 42 along the opposite side edges 36 and positioned in the crotch region 26 of the training pant 20. The leg elastic members 58 are desirably longitudinally aligned along each side edge 47 of the composite structure 33. Each leg elastic member 58 has a front terminal point 63 and a back terminal point 65, which points represent the longitudinal ends of the elastic gathering caused by the leg elastic members. The front terminal points 63 are desirably located adjacent the longitudinally innermost parts of the front side panels 34, and the back terminal points 65 are desirably located adjacent the longitudinally innermost parts of the back side panels 134.

The flap elastic members 53, the waist elastic members 54 and 56, and the leg elastic members 58 can be formed of any suitable elastic material. As is well known to those skilled in the art, suitable elastic materials include sheets, strands or ribbons of natural rubber, synthetic rubber, or thermoplastic elastomeric polymers. The elastic materials can be stretched and adhered to a substrate, adhered to a gathered substrate, or adhered to a substrate and then elasticized or shrunk, for example with the application of heat; such that elastic constrictive forces are imparted to the substrate. In one particular embodiment, for example, the leg elastic members 58 include a plurality of dry-spun coalesced multifilament spandex elastomeric threads sold under the trade name LYCRA® and available from E.I. DuPont de Nemours and Company, Wilmington, Delaware, U.S.A.

The outer cover 40 desirably includes a material that is substantially liquid impermeable, and can be elastic, stretchable or nonstretchable. The outer cover 40 can be a single layer of liquid impermeable material, but desirably includes a multi-layered laminate structure in which at least one of the layers is liquid impermeable. For instance, the outer cover 40 can include a liquid permeable outer layer and a liquid impermeable inner layer that are suitably joined together by a laminate adhesive (not shown). Suitable laminate adhesives, which can be applied continuously or intermittently as beads, a spray, parallel swirls, or the like, can be obtained from Findley Adhesives, Inc., of Wauwatosa, Wisconsin, U.S.A., or from National Starch and Chemical Company, Bridgewater, New Jersey, U.S.A. The liquid permeable outer layer can be any suitable material and desirably one that provides a generally cloth-like texture. One example of such a material is a 20 gsm (grams per square

meter) spunbond polypropylene nonwoven web. The outer layer may also be made of those materials of which liquid permeable bodyside liner 42 is made. While it is not a necessity for the outer layer to be liquid permeable, it is desired that it provides a relatively cloth-like texture to the wearer.

5 The inner layer of the outer cover 40 can be both liquid and vapor impermeable, or can be liquid impermeable and vapor permeable. The inner layer is desirably manufactured from a thin plastic film, although other flexible liquid impermeable materials may also be used. The inner layer, or the liquid impermeable outer cover 40 when
10 a single layer, prevents waste material from wetting articles, such as bedsheets and clothing, as well as the wearer and care giver. A suitable liquid impermeable film for use as a liquid impermeable inner layer, or a single layer liquid impermeable outer cover 40, is a 0.2 millimeter polyethylene film commercially available from Huntsman Packaging of Newport News, Virginia, U.S.A. If the outer cover 40 is a single layer of material, it can be embossed and/or matte finished to provide a more cloth-like appearance. As earlier mentioned, the
15 liquid impermeable material can permit vapors to escape from the interior of the disposable absorbent article, while still preventing liquids from passing through the outer cover 40. A suitable "breathable" material is composed of a microporous polymer film or a nonwoven fabric that has been coated or otherwise treated to impart a desired level of liquid impermeability. A suitable microporous film is a PMP-1 film material commercially
20 available from Mitsui Toatsu Chemicals, Inc., Tokyo, Japan, or an XKO-8044 polyolefin film commercially available from 3M Company, Minneapolis, Minnesota.

 The liquid permeable bodyside liner 42 is illustrated as overlying the outer cover 40 and absorbent assembly 44, and may but need not have the same dimensions as the outer cover 40. The bodyside liner 42 is desirably compliant, soft feeling, and non-irritating
25 to the child's skin. Further, the bodyside liner 42 can be less hydrophilic than the absorbent assembly 44, to present a relatively dry surface to the wearer and permit liquid to readily penetrate through its thickness.

 The bodyside liner 42 can be manufactured from a wide selection of web materials, such as synthetic fibers (for example, polyester or polypropylene fibers), natural
30 fibers (for example, wood or cotton fibers), a combination of natural and synthetic fibers,

porous foams, reticulated foams, apertured plastic films, or the like. Various woven and nonwoven fabrics can be used for the bodyside liner 42. For example, the bodyside liner can be composed of a meltblown or spunbonded web of polyolefin fibers. The bodyside liner can also be a bonded-carded web composed of natural and/or synthetic fibers. The bodyside
5 liner can be composed of a substantially hydrophobic material, and the hydrophobic material can, optionally, be treated with a surfactant or otherwise processed to impart a desired level of wettability and hydrophilicity. For example, the material can be surface treated with about 0.45 weight percent of a surfactant mixture including AHCOVEL® N-62 from Hodgson Textile Chemicals of Mount Holly, North Carolina, U.S.A. and GLUCOPON® 220UP from
10 Henkel Corporation of Ambler, Pennsylvania, in an active ratio of 3:1. The surfactant can be applied by any conventional means, such as spraying, printing, brush coating or the like. The surfactant can be applied to the entire bodyside liner 42 or can be selectively applied to particular sections of the bodyside liner, such as the medial section along the longitudinal centerline.

15 A suitable liquid permeable bodyside liner 42 is a nonwoven bicomponent web having a basis weight of about 27 gsm. The nonwoven bicomponent can be a spunbond bicomponent web, or a bonded carded bicomponent web. Suitable bicomponent staple fibers include a polyethylene/polypropylene bicomponent fiber available from CHISSO Corporation, Osaka, Japan. In this particular bicomponent fiber, the polypropylene forms
20 the core and the polyethylene forms the sheath of the fiber. Other fiber orientations are possible, such as multi-lobe, side-by-side, end-to-end, or the like. While the outer cover 40 and bodyside liner 42 can include elastomeric materials, it can be desirable in some embodiments for the composite structure to be generally inelastic, where the outer cover, the bodyside liner and the absorbent assembly include materials that are generally not
25 elastomeric.

The absorbent assembly 44 (Fig. 3) is positioned between the outer cover 40 and the bodyside liner 42, which components can be joined together by any suitable means, such as adhesives, as is well known in the art. The absorbent assembly 44 can be any
30 structure which is generally compressible, conformable, non-irritating to the child's skin, and capable of absorbing and retaining liquids and certain body wastes. The absorbent

assembly 44 can be manufactured in a wide variety of sizes and shapes, and from a wide variety of liquid absorbent materials commonly used in the art. For example, the absorbent assembly 44 can suitably include a matrix of hydrophilic fibers, such as a web of cellulosic fluff, mixed with particles of a high-absorbency material commonly known as superabsorbent material. In a particular embodiment, the absorbent assembly 44 includes a matrix of cellulosic fluff, such as wood pulp fluff, and superabsorbent hydrogel-forming particles. The wood pulp fluff can be exchanged with synthetic, polymeric, meltblown fibers or with a combination of meltblown fibers and natural fibers. The superabsorbent particles can be substantially homogeneously mixed with the hydrophilic fibers or can be nonuniformly mixed. The fluff and superabsorbent particles can also be selectively placed into desired zones of the absorbent assembly 44 to better contain and absorb body exudates. The concentration of the superabsorbent particles can also vary through the thickness of the absorbent assembly 44. Alternatively, the absorbent assembly 44 can include a laminate of fibrous webs and superabsorbent material or other suitable means of maintaining a superabsorbent material in a localized area.

Suitable superabsorbent materials can be selected from natural, synthetic, and modified natural polymers and materials. The superabsorbent materials can be inorganic materials, such as silica gels, or organic compounds, such as crosslinked polymers. Suitable superabsorbent materials are available from various commercial vendors, such as Dow Chemical Company located in Midland, Michigan, U.S.A., and Stockhausen GmbH & Co. KG, D-47805 Krefeld, Federal Republic of Germany. Typically, a superabsorbent material is capable of absorbing at least about 15 times its weight in water, and desirably is capable of absorbing more than about 25 times its weight in water.

In one embodiment, the absorbent assembly 44 is generally rectangular in shape, and includes a blend of wood pulp fluff and superabsorbent material. One preferred type of fluff is identified with the trade designation CR1654, available from U.S. Alliance, Childersburg, Alabama, U.S.A., and is a bleached, highly absorbent sulfate wood pulp containing primarily soft wood fibers. As a general rule, the superabsorbent material is present in the absorbent assembly 44 in an amount of from about 5 to about 90 weight percent based on total weight of the absorbent assembly. The absorbent assembly 44 suitably

has a density within the range of about 0.10 to about 0.50 grams per cubic centimeter. The absorbent assembly 44 may or may not be wrapped or encompassed by a suitable tissue wrap that maintains the integrity and/or shape of the absorbent assembly.

5 The absorbent chassis 32 can also incorporate other materials that are designed primarily to receive, temporarily store, and/or transport liquid along the mutually facing surface with the absorbent assembly 44, thereby maximizing the absorbent capacity of the absorbent assembly. One suitable material is referred to as a surge layer (not shown) and includes a material having a basis weight of about 50 to about 120 grams per square meter, and including a through-air-bonded-carded web of a homogenous blend of 60 percent
10 3 denier type T-256 bicomponent fiber including a polyester core/polyethylene sheath and 40 percent 6 denier type T-295 polyester fiber, both commercially available from Kosa Corporation of Salisbury, North Carolina, U.S.A.

As noted previously, the illustrated training pant 20 has front and back side panels 34 and 134 disposed on each side of the absorbent chassis 32. These transversely
15 opposed front side panels 34 and transversely opposed back side panels 134 can be permanently bonded to the composite structure 33 of the absorbent chassis 32 in the respective front and back regions 22 and 24, and are releasably attached to one another by a fastening system 80. More particularly, as shown best in Figs. 2 and 3, the front side panels 34 can be permanently bonded to and extend transversely beyond the linear side
20 edges 47 of the composite structure 33 in the front region 22 along attachment lines 66, and the back side panels 134 can be permanently bonded to and extend transversely beyond the linear side edges of the composite structure in the back region 24 along attachment lines 66. The side panels 34 and 134 may be attached using attachment means known to those skilled in the art such as adhesive, thermal or ultrasonic bonding. The side panels 34 and 134 can
25 also be formed as a portion of a component of the composite structure 33, such as the outer cover 40 or the bodyside liner 42, as shown in Fig. 1.

In particular embodiments for improved fit and appearance, the side panels 34 and 134 desirably have an average length dimension measured parallel to the longitudinal axis 48 that is about 20 percent or greater, and particularly about 25 percent or greater, of the
30 overall length dimension of the absorbent article, also measured parallel to the longitudinal

axis 48. For example, in training pants having an overall length dimension of about 54 centimeters, the side panels 34 and 134 desirably have an average length dimension of about 10 centimeters or greater, such as about 15 centimeters. While each of the side panels 34 and 134 extend from the waist opening 50 to one of the leg openings 52, the back side panels 134 have a continually decreasing length dimension moving from the attachment line 66 to a distal edge 68b of the back panel 134, as is best shown in Figs. 2 and 3.

Each of the side panels 34 and 134 can include one or more individual, distinct pieces of material. In particular embodiments, for example, each side panel 34 and 134 can include first and second side panel portions that are joined at a seam, with at least one of the portions including an elastomeric material. Still alternatively, each individual side panel 34 and 134 can include a single piece of material which is folded over upon itself along an intermediate fold line (not shown).

The side panels 34 and 134 desirably include an elastic material capable of stretching in a direction generally parallel to the transverse axis 49 of the training pant 20. In particular embodiments, the front and back side panels 34 and 134 may each include an interior portion 78 disposed between the distal edge 68a, 68b and the respective front or back center panel 35 or 135. In the illustrated embodiment in Fig. 3, the interior portions 78 are disposed between the distal edges 68a, 68b and the side edges 47 of the rectangular composite structure 33. The elastic material of the side panels 34 and 134 can be disposed in the interior portions 78 to render the side panels elastomeric in a direction generally parallel to the transverse axis 49. Most desirably, each side panel 34 and 134 is elastomeric from a waist end edge 72 to a leg end edge 70. More specifically, individual samples of side panel material, taken between the waist end edge 72 and the leg end edge 70 parallel to the transverse axis 49 and having a length from the attachment line 66 to the distal edge 68a, 68b and a width of about 2 centimeters, are all elastomeric.

Suitable elastic materials, as well as one described process of incorporating elastic side panels into a training pant, are described in the following U.S. Patents: 4,940,464 issued July 10, 1990 to Van Gompel et al.; 5,224,405 issued July 6, 1993 to Pohjola; 5,104,116 issued April 14, 1992 to Pohjola; and 5,046,272 issued September 10, 1991 to Vogt et al.; all of which are incorporated herein by reference. In particular embodiments, the

elastic material includes a stretch-thermal laminate (STL), a neck-bonded laminated (NBL), a reversibly necked laminate, or a stretch-bonded laminate (SBL) material. Methods of making such materials are well known to those skilled in the art and described in U.S. Patent 4,663,220 issued May 5, 1987 to Wisneski et al.; U.S. Patent 5,226,992 issued July 13, 1993 to Morman; and European Patent Application No. EP 0 217 032 published on April 8, 1987 in the names of Taylor et al.; all of which are incorporated herein by reference. Alternatively, the side panel material may include other woven or nonwoven materials, such as those described above as being suitable for the outer cover 40 or bodyside liner 42, or stretchable but inelastic materials.

The training pant 20 according to the present invention also includes a fastening system 80 for securing the training pant about the waist of the wearer (Fig. 1). The illustrated fastening system 80 includes fastening components 82 that are adapted to refastenably connect to mating fastening components 84. In one embodiment, one surface of each of the fastening components 82 and 84 includes a plurality of engaging elements that project from that surface. The engaging elements of these fastening components 82 are adapted to repeatedly engage and disengage the engaging elements of the mating fastening components 84.

In one particular embodiment, the fastening components 82 each include hook type fasteners and the mating fastening components 84 each include complementary loop type fasteners. In another particular embodiment, the fastening components 82 each include loop type fasteners and the mating fastening components 84 each include complementary hook type fasteners. The fastening components 82 and the mating fastening components 84 are desirably rectangular, although they may alternatively be square, round, oval, curved or otherwise non-rectangularly shaped.

Loop type fasteners typically include a fabric or material having a base or backing structure and a plurality of loop members extending upwardly from at least one surface of the backing structure. The loop material can be formed of any suitable material, such as acrylic, nylon or polyester, and can be formed by methods such as warp knitting, stitch bonding or needle punching. Suitable loop materials are available from Guilford Mills, Inc., Greensboro, North Carolina, U.S.A. under the trade designation No. 36549.

Hook type fasteners typically include a fabric or material having a base or backing structure and a plurality of hook members extending upwardly from at least one surface of the backing structure. In contrast to the loop type fasteners which desirably include a flexible fabric, the hook material advantageously includes a resilient material to minimize unintentional disengagement of the fastener components as a result of the hook material becoming deformed and catching on clothing or other items. The term "resilient" as used herein refers to an interlocking material having a predetermined shape and the property of the interlocking material to resume the predetermined shape after being engaged and disengaged from a mating, complementary interlocking material. Suitable hook material can be molded or extruded of nylon, polypropylene or another suitable material. Suitable single-sided hook materials for the fastening components 82 or the mating fastening components 84 are available from Velcro Industries B.V., Amsterdam, Netherlands or affiliates thereof, and are identified as Velcro HTH-829 with a uni-directional hook pattern and having a thickness of about 0.089 millimeters (3.5 mils) and HTH-851 with a uni-directional hook pattern and having a thickness of about 0.051 millimeters (2 mils).

With particular reference to Fig. 4, a plurality of garment assemblies 108 aligned in a cross direction is shown. The invention can be carried out in either the cross direction (Fig. 4) or the machine direction (Fig. 5). The garment assembly 108 includes a lamination of films and nonwovens, including a bodyside liner 42 and an outer cover 40, together with waist elastics 54 and 56, leg elastics 58, and an absorbent assembly 44, as described above, placed on a vacuum device (not shown). Adjacent garment assemblies 108 are joined between the back side panel 134 and the front side panel 34. The exposed surface of the garment assembly 108 is the inner surface 28 of the chassis 32, as shown in Fig. 4.

In carrying out the invention in the cross direction, two fastening components 82 are bonded to the back side panels 134 and two fastening components 82 are bonded to the front side panels 34 of each garment assembly 108 near the planned locations of the distal edges 68a and 68b, with a spacing 81 of roughly 0.25-1.0 inch between fastening components 82 on adjacent garment assemblies 108. Alternatively, a single, oversized fastening component can be placed overlapping the planned locations of the distal edges 68a and 68b of two adjacent assemblies, to be separated into two fastening components 82 at the

product cut-off stage. The fastening components 82 may include hook type fasteners or loop type fasteners, as described above, and can be bonded to the assembly 108 with ultrasonic, thermal, or adhesive bonds, or other means.

5 After the fastening components 82 have been bonded to the garment assemblies 108, two mating fastening components 84 are folded once, i.e. C-folded, cut to length, and placed on the inner surface 28 of the front side panels 34, or back side panels 134, of each garment assembly 108 near the planned locations of the distal edges 68a and 68b, also with a spacing 81 of roughly 0.25-1.0 inch between mating fastening components 84 on adjacent garment assemblies 108, with the folded edges 118 facing one another, as shown in Fig. 6.

10 All of the joined garment assemblies 108 are then folded longitudinally, thereby aligning the fastening components 82 with the folded mating fastening components 84, as shown in Fig. 6. Adjacent garment assemblies 108 are then separated along cut line 110, shown in Fig. 6, thereby forming discrete products with dual lap side seams 100. When the assembly 108 is cut, the elastic property of the front and back side panels 34, 134 causes the front and back side panels 34, 134 to snap back from the cutting line 110, such that the fastening components 82 are then closely aligned with the resulting distal edges 68a, 68b of the front and back side panels 34, 134 as shown in a cross-sectional view of a finished absorbent garment 20 in Fig. 7. The mating fastening components 84 can be unfastened and refastened on either the front side of the garment or the back side of the garment.

15 As mentioned, the process of the invention can also be carried out in the machine direction, shown in Fig. 5. In carrying out the invention, two fastening components 82 are bonded to the back side panels 134 and two fastening components 82 are bonded to the front side panels 34 of each garment assembly 108. Alternatively, two oversized strips of fastening components can be applied to both the front side panel 34 and the back side panel 134, overlapping the planned locations of the front waist edge 38 and the back waist edge 39 of adjacent assemblies, to be separated at the product cut-off stage.

20 After the fastening components 82 have been bonded to the garment assemblies 108 in the machine direction process (Fig. 5), adjacent assemblies 108 are

separated at the planned locations of the front waist edge 38 and the back waist edge 39 of adjacent assemblies 108. Two mating fastening components 84 are folded once, i.e. C-folded, cut to length, and placed on the fastening components 82 of the front side panels 34, or back side panels 134, near the distal edges 68a and 68b with the folded edges 118 facing the distal edges 68a and 68b. Alternatively, prior to separating adjacent garment assemblies 108, two oversized mating fastening components 83, roughly twice as long as the fastening components 82, can be folded once and placed on the fastening components 82 of two adjacent garment assemblies 108, overlapping the planned locations of the front waist edge 38 and the back waist edge 39 of the adjacent garment assemblies 108, to be separated into two mating fastening components 84 at the product cut-off stage. In this alternative method, the oversized, folded mating fastening components 84 are applied to every other planned location of the front waist edge 38 and the back waist edge 39 of adjacent garment assemblies 108.

Once the adjacent garment assemblies 108 have been separated from one another, each individual garment assembly 108 is folded longitudinally, thereby aligning the fastening components 82 with the folded mating fastening components 84, as shown in Fig. 7.

The product resulting from the invention is an absorbent product 20, shown in Fig. 1, having dual refastenable, prefastened hook and loop fasteners, oriented as lap side seams 100, along the distal edges 68a and 68b (Fig. 3) of the front and back side panels 34 and 134. The resulting orientation of the lap side seams 100 puts the prefastened seams under shearing strain during use, as opposed to peel forces. The term "lap side seam," as used herein, refers to a seam connecting the front and back side panels 34 and 134 or materials bonded thereto, such as fastening components 82 and 84, such that the front and back side panels and/or materials bonded thereto overlap and the seam is located between the distal edges 68a and 68b of the front and rear side panels 34 and 134.

The absorbent chassis 32 and the fastening system 80 together define a refastenable product having a waist opening 50 and a pair of leg openings 52. When the fastening system is engaged, it can be appreciated that the refastenable product includes a pair of elastomeric front side panels 34 extending from the waist opening 50 to each leg

opening 52, a pair of elastomeric back side panels 134 extending from the waist opening 50 to each leg opening 52, and two pairs of lap side seams 100 extending from the waist opening 50 to each leg opening 52 and positioned between the elastomeric front and back side panels 34, 134, an elastomeric front waistband 54 disposed on the front side 22 and positioned between the pair of elastomeric front side panels 34, an elastomeric back waistband 56 disposed on the back side 24 and positioned between the pair of elastomeric back side panels 134, and at least a pair of the leg elastic members 58 which partially encircle each leg opening 52. More preferably, more than one leg elastic member 58 partially or fully encircles each leg opening 52. Each leg elastic member 58 extends from adjacent an elastomeric front side panel 34 on the front side 22 to adjacent an elastomeric back side panel 134 on the back side 24.

As described herein, the various components of the absorbent garment 20 can be integrally assembled together employing various types of suitable attachment means, such as adhesive, sonic and thermal bonds or combinations thereof. The resulting product is an absorbent garment having refastenable side seams that can be opened for donning or removal at either side, in either the front or the back of the garment.

It will be appreciated that details of the foregoing embodiments, given for purposes of illustration, are not to be construed as limiting the scope of this invention. Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention, which is defined in the following claims and all equivalents thereto. Further, it is recognized that many embodiments may be conceived that do not achieve all of the advantages of some embodiments, particularly of the preferred embodiments, yet the absence of a particular advantage shall not be construed to necessarily mean that such an embodiment is outside the scope of the present invention.

WE CLAIM:

1. A method of producing refastenable side seams in an absorbent garment, comprising the steps of:
 - aligning a plurality of garment assemblies in a cross direction, each garment assembly including a chassis with two back side panels and two front side panels, wherein adjacent garment assemblies are joined between a back side panel and a front side panel;
 - bonding a fastening component to each of the back side panels and each of the front side panels of each garment assembly;
 - folding two mating fastening components and placing the mating fastening components on two of the fastening components;
 - folding the garment assemblies such that the folded mating fastening components are located between one of the fastening components on the front side panel and one of the fastening components on the back side panel; and
 - separating adjacent garment assemblies from one another by cutting between the joined back side panels and the joined front side panels.
2. The method of Claim 1, further comprising the step of placing the plurality of garment assemblies on a vacuum device in the cross direction.
3. The method of Claim 1 wherein the fastening components bonded to adjacent garment assemblies are spaced between about 0.25 inch and about 1.0 inch apart.
4. The method of Claim 1 wherein the fastening components are bonded to an inner surface of the garment assemblies.
5. The method of Claim 1, further comprising the steps of bonding an oversized fastening component to the joined front side panels of adjacent garment assemblies, and separating the oversized fastening component into two fastening components when the adjacent garment assemblies are separated from one another.

6. The method of Claim 1, further comprising the steps of bonding an oversized fastening component to the joined back side panels of adjacent garment assemblies, and separating the oversized fastening component into two fastening components when the adjacent garment assemblies are separated from one another.

7. The method of Claim 1 wherein the folded edges of the mating fastening components face planned distal edges of the front and back side panels.

8. The method of Claim 1 wherein the fastening component comprises a hook material and the mating fastening component comprises a loop material.

9. The method of Claim 1 wherein the fastening component comprises a loop material and the mating fastening component comprises a hook material.

10. A method of producing refastenable side seams in an absorbent garment, comprising the steps of:

aligning a plurality of garment assemblies in a machine direction, each garment assembly including a chassis with two back side panels and two front side panels, wherein adjacent garment assemblies are joined between the two back side panels of a first garment assembly and the two front side panels of a second garment assembly;

bonding a fastening component to each of the back side panels and each of the front side panels of each garment assembly;

folding two mating fastening components and placing the mating fastening components on two of the fastening components;

separating adjacent garment assemblies from one another by cutting between the joined back side panels and the joined front side panels; and

folding the garment assemblies such that the folded mating fastening components are located between one of the fastening components on the front side panel and one of the fastening components on the back side panel.

11. The method of Claim 10, further comprising the step of placing the plurality of garment assemblies on a vacuum device in the machine direction.

12. The method of Claim 10 wherein the fastening components are bonded to an inner surface of the garment assemblies.

13. The method of Claim 10, further comprising the steps of bonding an oversized fastening component to the joined front and back side panels of adjacent garment assemblies, and separating the oversized fastening component into two fastening components when the adjacent garment assemblies are separated from one another.

14. The method of Claim 10 wherein the folded edges of the mating fastening components face distal edges of the front and back side panels.

15. The method of Claim 10, further comprising the steps of applying an oversized mating fastening component over the fastening components of adjacent garment assemblies, and separating the oversized mating fastening components into two mating fastening components when the adjacent garment assemblies are separated from one another.

16. The method of Claim 15 wherein the single mating fastening component is applied to every other pair of adjacent fastening components in the machine direction.

17. The method of Claim 10 wherein the fastening component comprises a hook material and the mating fastening component comprises a loop material.

18. The method of Claim 10 wherein the fastening component comprises a loop material and the mating fastening component comprises a hook material.

19. A method of producing refastenable side seams in an absorbent garment, comprising the steps of:

bonding a fastening component along distal edges of each of two back side panels and each of two front side panels of a garment assembly;

folding two mating fastening components and placing the mating fastening components on two of the fastening components; and

folding the garment assembly such that the folded mating fastening components are located between one of the fastening components on the front side panel and one of the fastening components on the back side panel.

20. The method of Claim 19 further comprising the step of placing the garment assembly in a cross direction.

21. The method of Claim 19 further comprising the step of placing the garment assembly in a machine direction.

22. The method of Claim 19 wherein the fastening components are bonded to an inner surface of the garment assembly.

23. The method of Claim 19 wherein the folded mating fastening component between two fastening components results in two lap side seams.

24. The method of Claim 19 wherein the fastening component comprises a hook material and the mating fastening component comprises a loop material.

25. The method of Claim 19 wherein the fastening component comprises a loop material and the mating fastening component comprises a hook material.

1/5

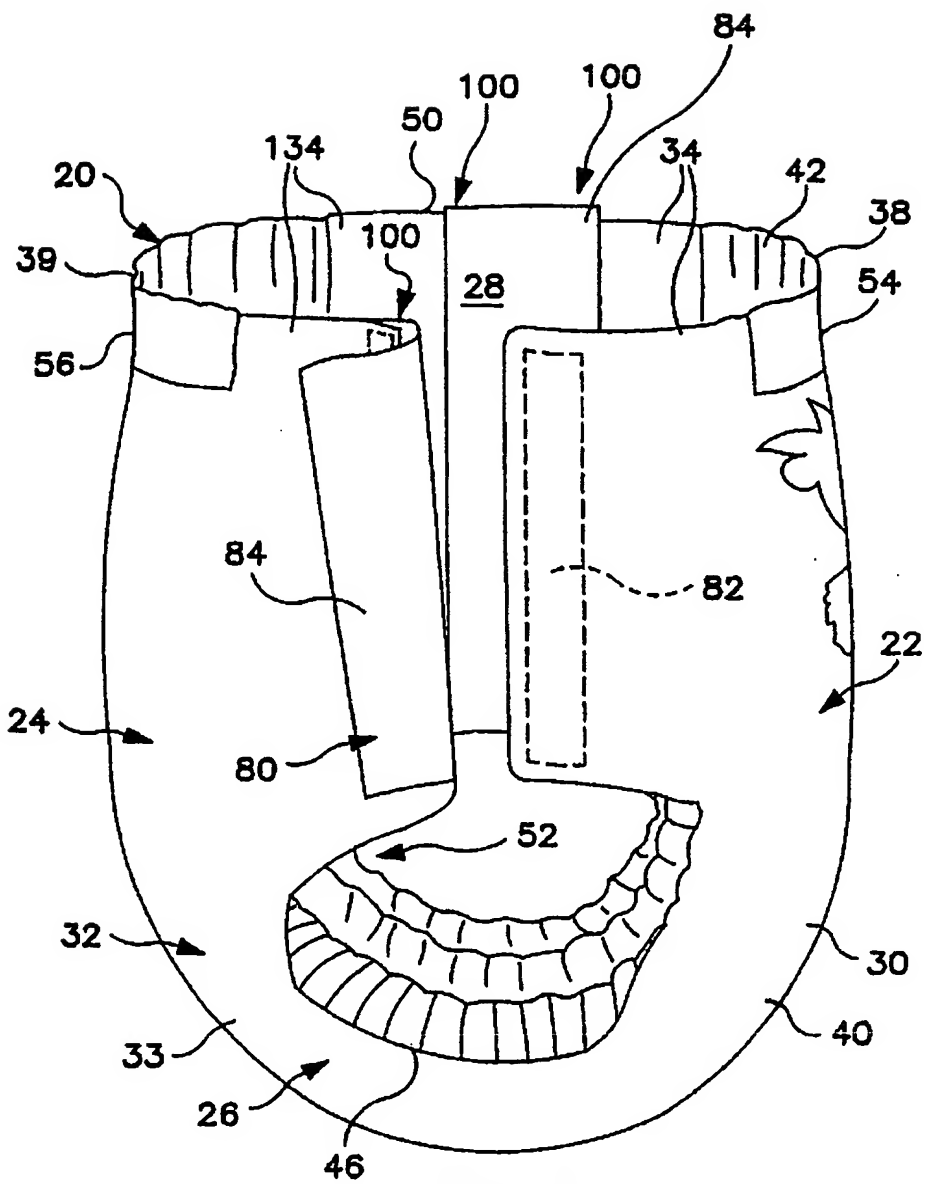


FIG. 1

2/5

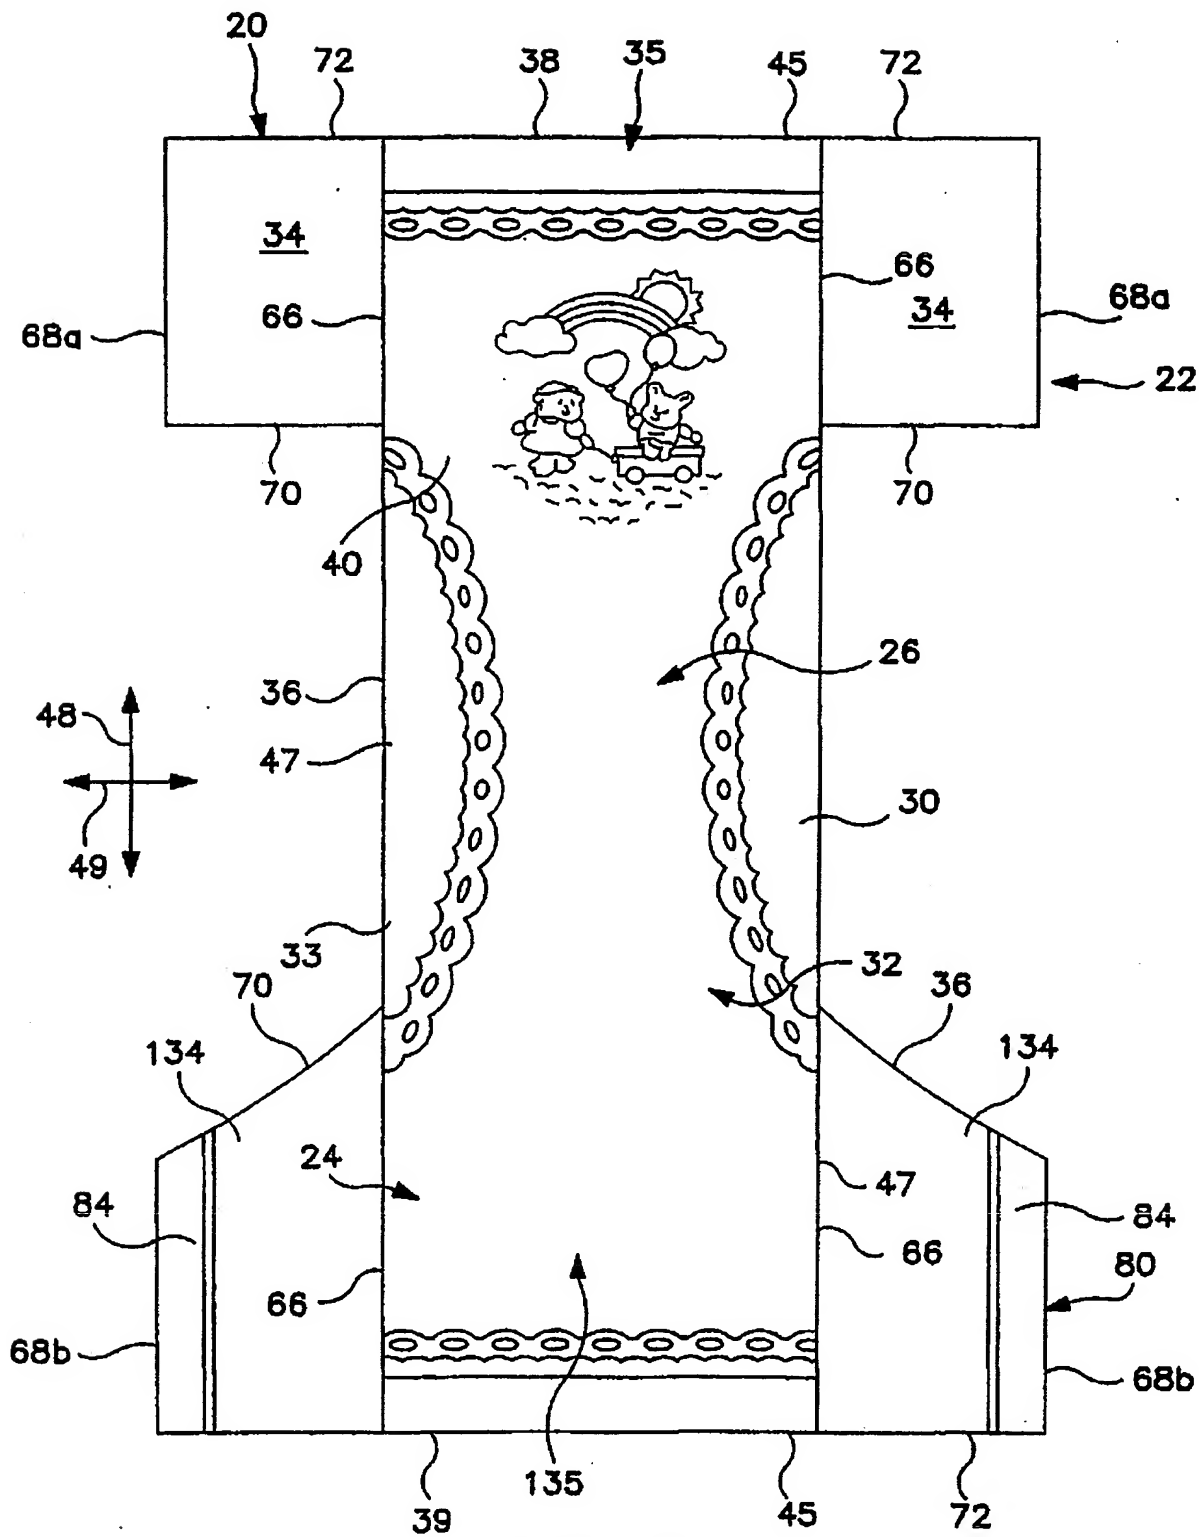


FIG. 2

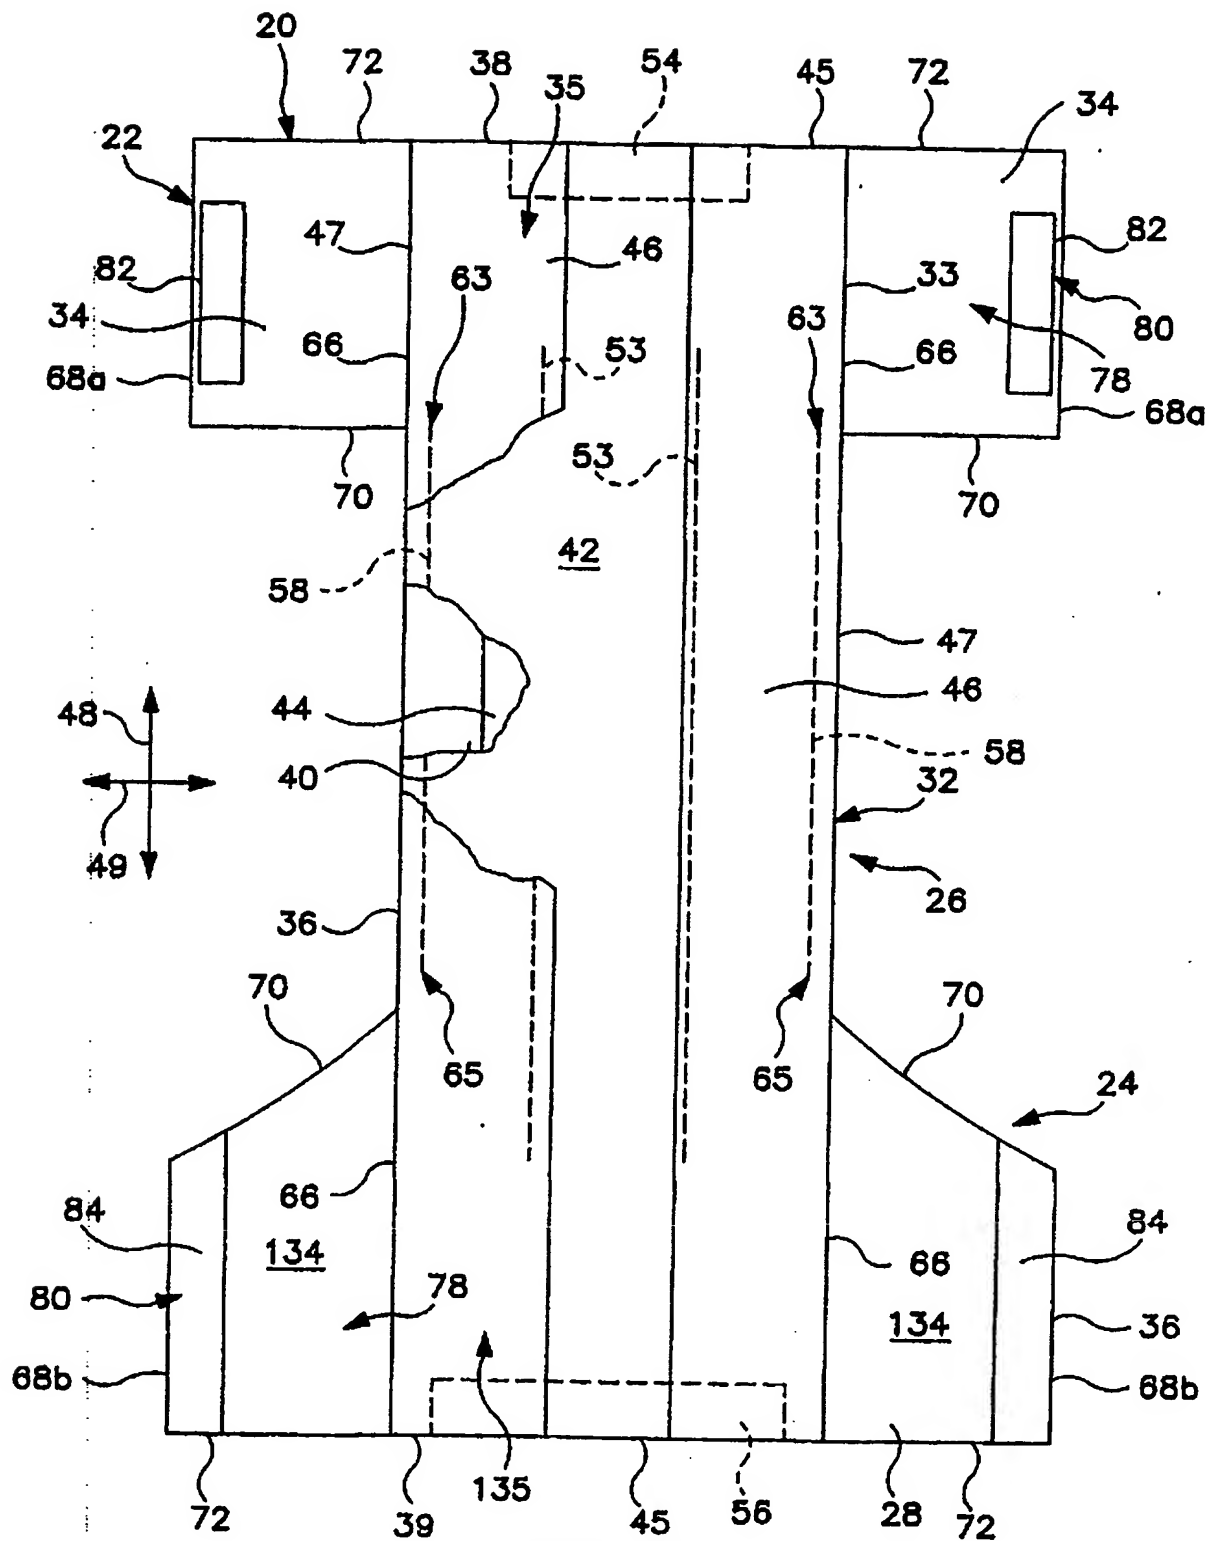


FIG. 3

FIG. 5

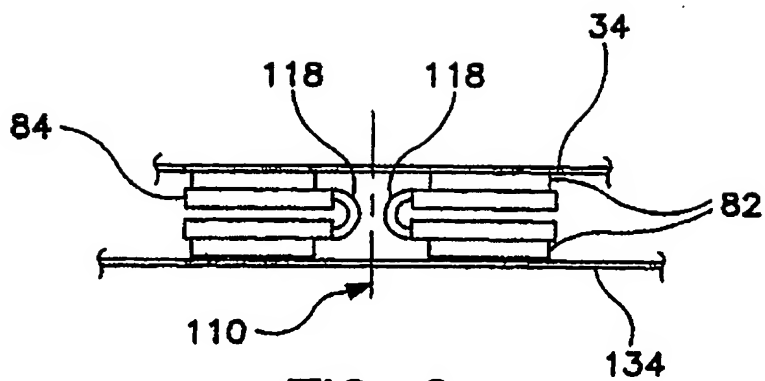


FIG. 6

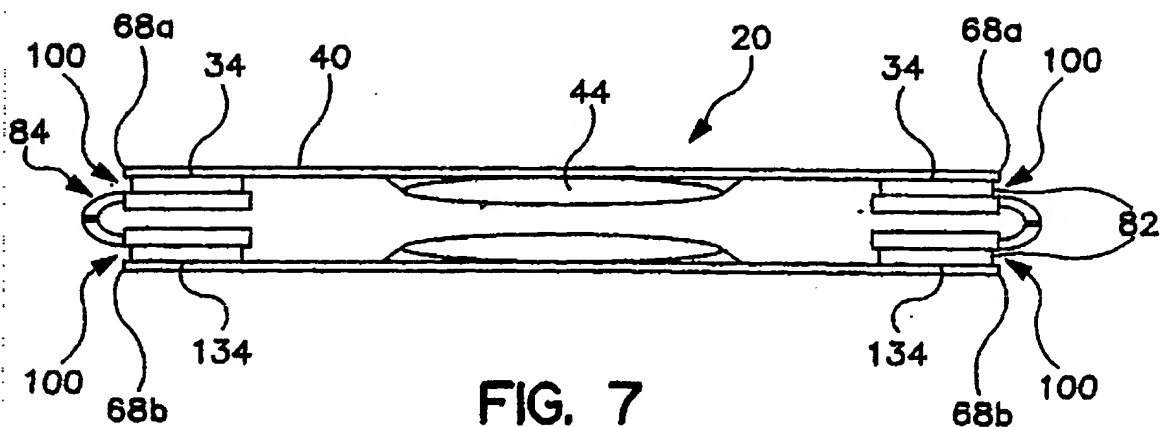


FIG. 7

INTERNATIONAL SEARCH REPORT

Int. Patent Application No
PCT/US 01/15244

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61F13/15 A61F13/56		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 27462 A (GUSTAFSSON ANDERS ;MOELNLYCKE AB (SE); WIDLUND URBAN (SE)) 19 October 1995 (1995-10-19) page 5, line 19 -page 8, line 10 page 8, line 34 -page 12, line 10 page 12, line 34 -page 15, line 22; claims; figures -----	1, 10, 19
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 15 October 2001		Date of mailing of the international search report 29/10/2001
Name and mailing address of the ISA European Patent Office, P.B. 6616 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl Fax: (+31-70) 340-3016		Authorized officer Douskas, K

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT
information on patent family members

International Application No
PCT/US 01/15244

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9527462 A	19-10-1995	SE 508612 C2	19-10-1998
		AT 183634 T	15-09-1999
		AU 687548 B2	26-02-1998
		AU 2271495 A	30-10-1995
		CA 2187366 A1	19-10-1995
		CN 1146718 A	02-04-1997
		CZ 9602993 A3	12-03-1997
		DE 69511688 D1	30-09-1999
		DE 69511688 T2	17-02-2000
		DK 755238 T3	27-03-2000
		EP 0755238 A1	29-01-1997
		FI 964086 A	11-10-1996
		GB 2288314 A ,B	18-10-1995
		HU 77686 A2	28-07-1998
		IL 112986 A	14-07-1999
		IL 112987 A	22-09-1999
		JP 9511427 T	18-11-1997
		NO 964329 A	11-10-1996
		NZ 284183 A	22-09-1997
		PL 316682 A1	03-02-1997
		SE 9401227 A	13-10-1995
		WO 9527462 A1	19-10-1995
		SK 126896 A3	06-08-1997
		US 6210388 B1	03-04-2001

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.